
LIKO-S

LIKO-S.COM




Chatbox Single



Chatbox Solo



Chatbox Duo



Chatbox Duo Plus



Chatbox Quattro



silen
Authorized dealer

silen CHATBOX

LIKO-S

# Chatbox Single

**Private canopy for one**

When phone and video calls aren't meant
for the entire office, this pod is a gift.
Quiet, private, considerate.

**1 person**



### Essential quality
With a sole focus on essential features, you enjoy world-class quality without breaking the bank.

### Quiet
Best-in-class soundproofing. Blocks 34dB outside noise, 31dB inside speech. Office-tested, ISO-approved in the laboratory.

### Comfortable
Ergonomic, quiet, echo-free, and speech-optimized. Automated LEDs and ventilation. Over twice the standard airflow rate.

### Easy to relocate
Add-on mobility kit for in-office relocation. Easy reassembly for moving offices.

### Quick assembly
Thanks to its smart prefabricated design, it sets up in 30 minutes. Disassembly and reassembly are just as easy.

### Endless customization
Swap side skins and cover trims with a snap of a magnet. Choose from a variety of colors, fabrics, and furnishing options.

### Sustainable
Fully renewable with a 20+ year lifespan. Designed sustainably across materials, production, and impact on surrounding environments.

### Standard exterior colors


- Black
- White

### Standard interior color


- Dark gray

### Colour collection for additional price


- Cotton
- Opal
- Marshmallow
- Myosotis
- Paprika
- Azurite
- Storm Gray
- Frozen Blue

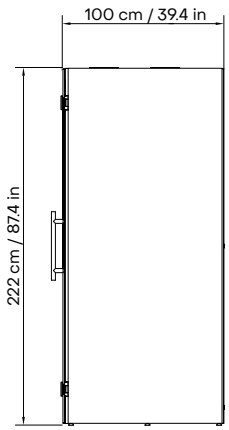



RIGHT VIEW

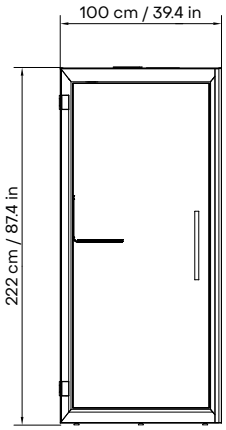



FRONT VIEW

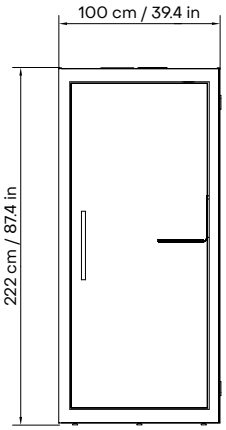



REAR VIEW

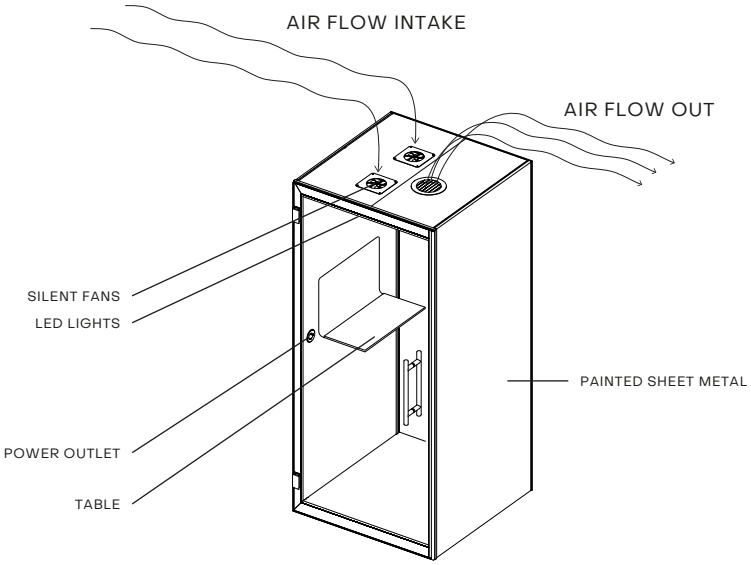


TOP VIEW

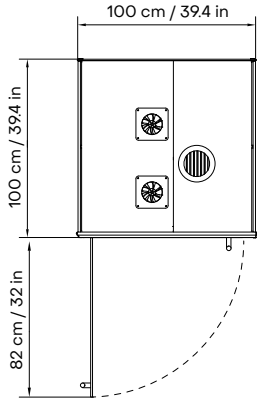
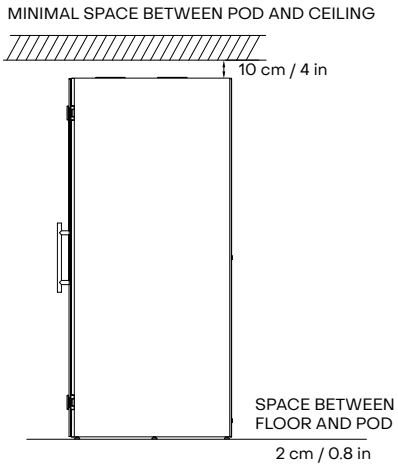
# Chatbox Single technical specification

| GENERAL PRODUCT INFO | |
|---|---|
| **Exterior size (W×D×H)** | 100 × 100 × 222 cm<br>39.4 × 39.4 × 87.4 in |
| **Interior size (W×D×H)** | 87 × 98 × 204 cm<br>34.2 × 38.6 × 80.3 in |
| **Weight (net)** | 300 kg / 661.4 lb |
| **Door handedness** | left- and right-handed door in one |
| **Air ventilation** | low consumption air circulation system (max 3.4 W) |
| **Air flow** | air circulation speed is more than 22 l/s (79 $m^3$/h) (47 $ft^3$/min) |
| **Lighting** | energy-efficient LED light (6.7 W, 4,000 K, 900 lm) |
| **Power outlets** | Black socket with 110-240 V (10 A) + USB-A+C |
| **Power cord** | 3 m / 9 ft 10 in |
| **Exterior material** | painted sheet metal |
| **Glass** | sound control laminated safety glass |
| **Floor** | antistatic and stain resistant low loop pile carpet for public spaces, EN 1307 |
| **Acoustic surfaces** | acoustic EchoFree panel |
| **Adjustable glides** | for easy leveling from inside the booth |
| **Table** | built-in table with antibacterial laminate finish, 680 × 300 × 132 mm / 28 × 12 × 5,2 in |

| CERTIFICATION | |
|---|---|
| **Electrical safety** | CE-mark |
| **Fire safety** | Class A according to UL 723, ASTM E84, ASTM E162 (walls and ceiling) |
| **Emissions** | Indoor Advantage™ Gold certified by SCS Global Services |
| **Sound reduction** | 27,3 db (class B according to ISO 23351-1) |
| **Airborne sound insulation R'w** | 34 dB according to ISO 16283-1 and ISO 717-1, measured on site by an accredited specialist |
| **Sound transmission class STC** | 34 dB according to ASTM E90, measured on site by an accredited specialist |


# Chatbox Single features



*Retractable coat/bag hook*



*Control panel*



*Occupancy light*



*Mobility kit*

| EXTRA FEATURE | |
|---|---|
| **Retractable coat/bag hook** | A practical and nice-looking foldable hook for coat or bag |
| **Control panel** | Airflow dimmer, light brightness dimmer, light temperature selection and controls for optional extras |
| **Occupancy light** | |
| **Whiteboard** | Magnetic laminate surface, 595 × 750 mm / 28 × 30 in |
| **Screen bracket** | Universal bracket in accordance with VESA standard, for up to 24” screen (screen not included) |
| **Seating** | · Integrated stool with leg rest, height adjustable 560–820 mm / 22.4–32.3 in, seat fabric dark gray<br>· HAY Revolver bar stool |
| **Mobility kit** | Set of detachable casters for moving booths.<br>Can be used for all Chatbox models. |

# Options for surfaces

## Exterior colors collection

White | Black | Cotton | Opal | Marshmallow | Myosotis | Paprika | Azurite | Storm Gray | Frozen Blue | Whiteboard paint | Slatted wall

## Standard wall and ceiling

Dark gray

## Standard floor

Dark gray

## Standard profile

Black

silen CHATBOX

LIKO-S

# Chatbox Solo

**Lush, stealthy solo flights**

When a basic phone booth feels too cramped for serious work, Solo takes over. More room to focus for longer and keep outside distractions at bay.

**1 person**



c UL us LISTED

CERTIFIED INDOOR AIR QUALITY

CE

### Essential quality
With a sole focus on essential features, you enjoy world-class quality without breaking the bank.

### Quiet
Best-in-class soundproofing. Blocks 34dB outside noise, 31dB inside speech. Office-tested, ISO-approved in the laboratory.

### Comfortable
Ergonomic, quiet, echo-free, and speech-optimized. Automated LEDs and ventilation. Over twice the standard airflow rate.

### Easy to relocate
Add-on mobility kit for in-office relocation. Easy reassembly for moving offices.

### Quick assembly
Thanks to its smart prefabricated design, it sets up in 40 minutes. Disassembly and reassembly are just as easy.

### Endless customization
Swappable side skin and cover trim keeps your pod looking fresh and up to date (We call it Silen Dynamics.) Choose from different colors, covers, and customization options. All furniture can be easily removed and replaced.

### Sustainable
Swap side skins and cover trims with a snap of a magnet. Choose from a variety of colors, fabrics, and furnishing options.

### Standard exterior colors


- Black
- White

### Standard interior color


- Dark gray

### Colour collection for additional price


- Cotton
- Opal
- Marshmallow
- Myosotis
- Paprika
- Azurite
- Storm Gray
- Frozen Blue

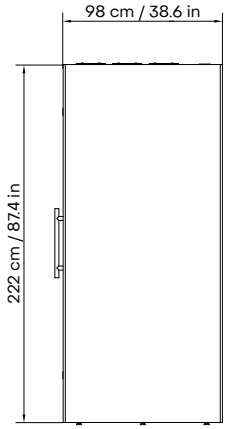



RIGHT VIEW

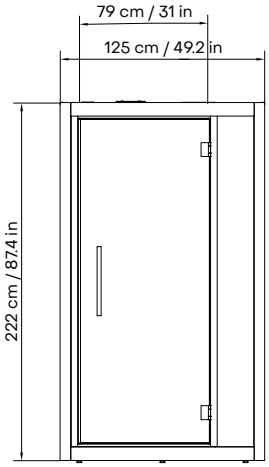



FRONT VIEW

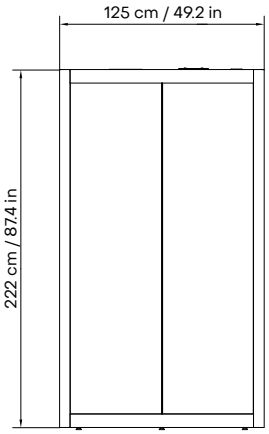



REAR VIEW

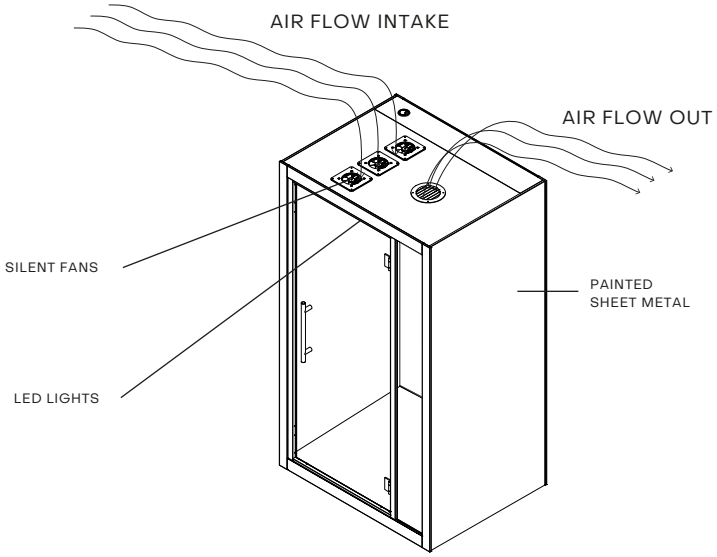


TOP VIEW

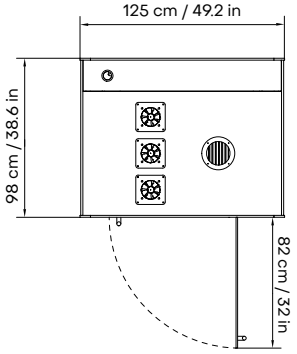


MINIMAL SPACE BETWEEN POD AND CEILING

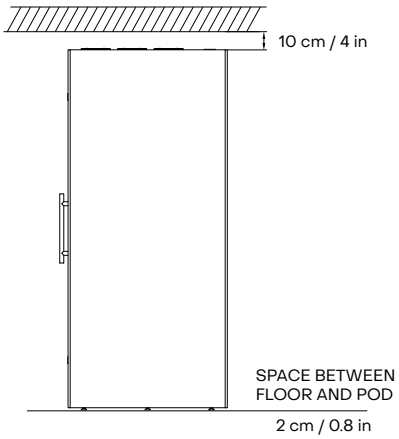

# Chatbox Solo technical specification

| GENERAL PRODUCT INFO | |
|---|---|
| **Exterior size (W×D×H)** | 125 × 98 × 222 cm<br>49.2 × 38.6 × 87.4 in |
| **Interior size (W×D×H)** | 113 × 91 × 204 cm<br>44.5 × 35.8 × 80.3 in |
| **Weight (net)** | 380 kg / 838 lb |
| **Door handedness** | right-handed door |
| **Air ventilation** | low consumption air circulation system (max 5.1 W) |
| **Air flow** | air circulation speed is more than 55 l/s (198 $m^3$/h) (117 $ft^3$/min) |
| **Lighting** | energy-efficient LED light (28 W, 4000 K, 2240 lm) |
| **Power outlets** | Black socket with 110–240 V (10 A) + USB-A+C |
| **Power cord** | 3 m / 9 ft 10 in |
| **Exterior material** | painted sheet metal |
| **Glass** | sound control laminated safety glass |
| **Floor** | antistatic and stain resistant low loop pile carpet for public spaces, EN 1307 |
| **Acoustic surfaces** | acoustic EchoFree panel |
| **Adjustable glides** | for easy leveling from inside the booth |

| CERTIFICATION | |
|---|---|
| **Electrical safety** | CE-mark |
| **Fire safety** | Class A according to UL 723, ASTM E84, ASTM E162 (walls and ceiling) |
| **Emissions** | Indoor Advantage™ Gold certified by SCS Global Services |
| **Sound reduction** | 27,8 db (class B according to ISO 23351-1) |
| **Airborne sound insulation R'w** | 34 dB according to ISO 16283-1 and ISO 717-1, measured on site by an accredited specialist |
| **Sound transmission class STC** | 34 dB according to ASTM E90, measured on site by an accredited specialist |


# Chatbox Solo features



*Retractable coat/bag hook*



*Control panel*



*Occupancy light*



*Mobility kit*

| EXTRA FEATURE | |
|---|---|
| **Retractable coat/bag hook** | A practical and nice-looking foldable hook for coat or bag |
| **Control panel** | Airflow dimmer, light brightness dimmer, light temperature selection and controls for optional extras |
| **Occupancy light** | |
| **Mobility kit** | Set of detachable casters for moving booths.<br>Can be used for all Chatbox models. |

# Options for surfaces

## Exterior colors collection



White | Black | Cotton | Opal | Marshmallow | Myosotis | Paprika | Azurite | Storm Gray | Frozen Blue | Whiteboard paint | Slatted wall

### Standard wall and ceiling



Dark gray

### Standard floor



Dark gray

### Standard profile



Black

silen CHATBOX

LIKO-S

# Chatbox Duo

**Nursery for nascent ideas**

One-on-ones thrive here. A safe space for private conversations. A quiet bubble for chasing and sharing ideas.

**1-2 people**



c UL us LISTED

CERTIFIED INDOOR AIR QUALITY

CE

### Essential quality
With a sole focus on essential features, you enjoy world-class quality without breaking the bank.

### Quiet
Best-in-class soundproofing. Blocks 34dB outside noise, 31dB inside speech. Office-tested, ISO-approved in the laboratory.

### Comfortable
Ergonomic, quiet, echo-free, and speech-optimized. Automated LEDs and ventilation. Over twice the standard airflow rate.

### Easy to relocate
Add-on mobility kit for in-office relocation. Easy reassembly for moving offices.

### Quick assembly
Thanks to its smart prefabricated design, it sets up in 90 minutes. Disassembly and reassembly are just as easy.

### Endless customization
Swap side skins and cover trims with a snap of a magnet. Choose from a variety of colors, fabrics, and furnishing options.

### Sustainable
Fully renewable with a 20+ year lifespan. Designed sustainably across materials, production, and impact on surrounding environments.

### Standard exterior colors


- Black
- White


### Standard interior color


- Dark gray


### Colour collection for additional price

- Cotton
- Opal
- Marshmallow
- Myosotis
- Paprika
- Azurite
- Storm Gray
- Frozen Blue

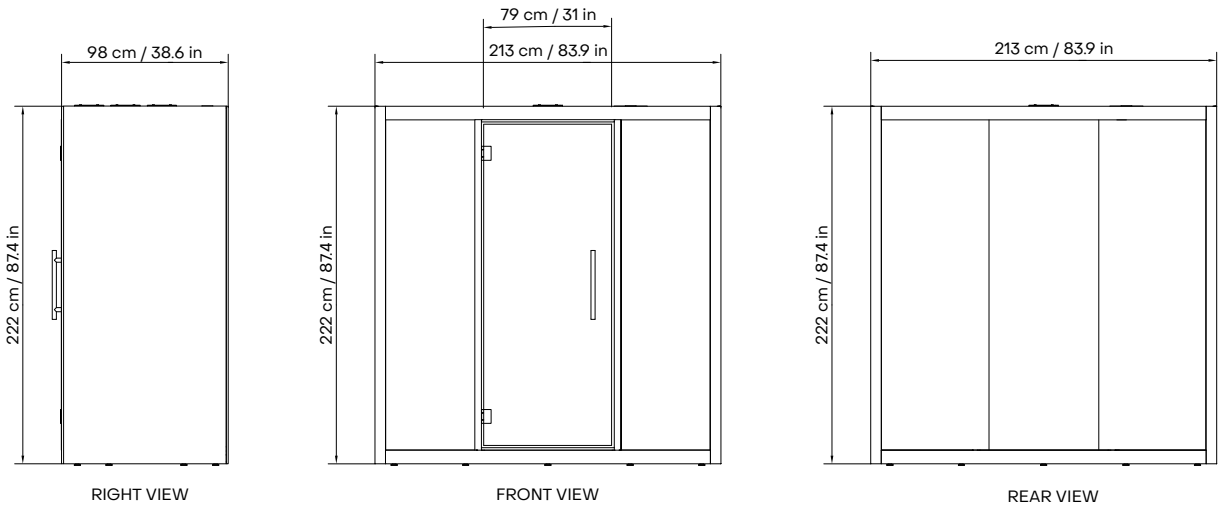
98 cm / 38.6 in
222 cm / 87.4 in
RIGHT VIEW
79 cm / 31 in
213 cm / 83.9 in
222 cm / 87.4 in
FRONT VIEW
213 cm / 83.9 in
222 cm / 87.4 in
REAR VIEW

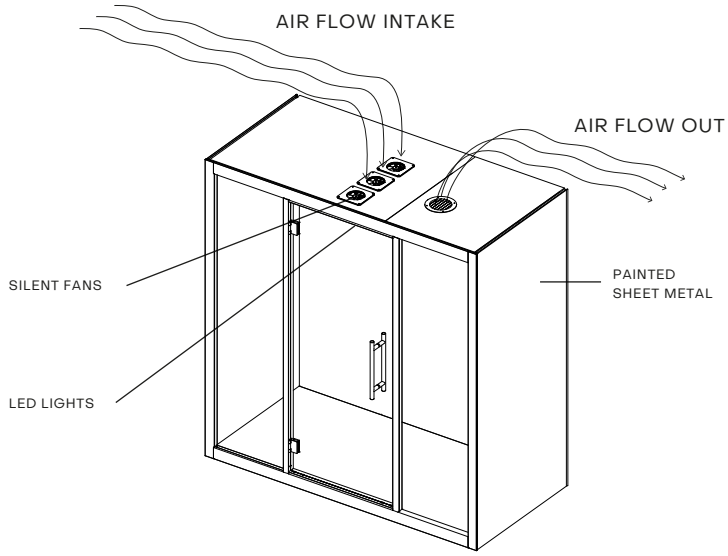
AIR FLOW INTAKE
AIR FLOW OUT
SILENT FANS
LED LIGHTS
PAINTED
SHEET METAL

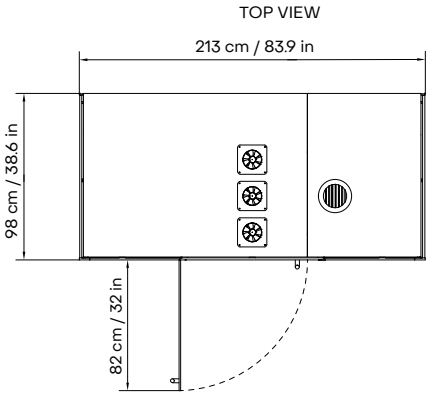
TOP VIEW
213 cm / 83.9 in
98 cm / 38.6 in
82 cm / 32 in

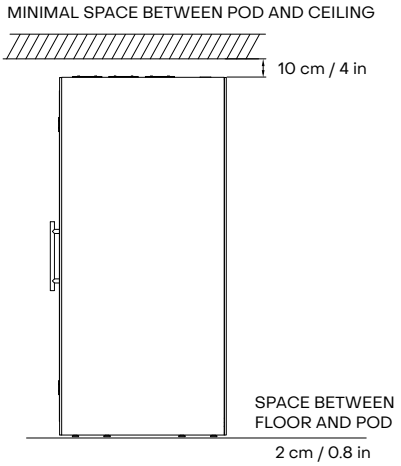
MINIMAL SPACE BETWEEN POD AND CEILING
10 cm / 4 in
SPACE BETWEEN
FLOOR AND POD
2 cm / 0.8 in

# Chatbox Duo technical specification

| GENERAL PRODUCT INFO | |
|---|---|
| **Exterior size (W×D×H)** | 213 × 98 × 222 cm<br>83.9 × 38.6 × 87.4 in |
| **Interior size (W×D×H)** | 200 × 91 × 204 cm<br>78.7 × 35.8 × 80.3 in |
| **Weight (net)** | 490 kg / 1080 lb |
| **Door handedness** | left- and right-handed door in one |
| **Air ventilation** | low consumption air circulation system (max 5.1 W) |
| **Air flow** | air circulation speed is more than 55 l/s (198 $m^3$/h) (117 $ft^3$/min) |
| **Lighting** | energy-efficient LED light (28 W, 4000 K, 2240 lm) |
| **Power outlets** | Option one: 2 x 110-240 V (10 A)<br>Option two: 110-240 V (10 A) + USB-A+C |
| **Power cord** | 3 m / 9 ft 10 in |
| **Exterior material** | painted sheet metal |
| **Glass** | sound control laminated safety glass |
| **Floor** | antistatic and stain resistant low loop pile carpet for public spaces, EN 1307 |
| **Acoustic surfaces** | acoustic EchoFree panel |
| **Adjustable glides** | for easy leveling from inside the booth |

| CERTIFICATION | |
|---|---|
| **Electrical safety** | CE-mark |
| **Fire safety** | Class A according to UL 723, ASTM E84, ASTM E162 (walls and ceiling) |
| **Emissions** | Indoor Advantage™ Gold certified by SCS Global Services |
| **Sound reduction** | 29,4 db (class B according to ISO 23351-1) |
| **Airborne sound insulation R'w** | 34 dB according to ISO 16283-1 and ISO 717-1, measured on site by an accredited specialist |
| **Sound transmission class STC** | 34 dB according to ASTM E90, measured on site by an accredited specialist |


# Chatbox Duo features



*Retractable coat/bag hook*



*Control panel*



*Occupancy light*



*Mobility kit*

| EXTRA FEATURE | |
|---|---|
| **Retractable coat/bag hook** | A practical and nice-looking foldable hook for coat or bag |
| **Control panel** | Airflow dimmer, light brightness dimmer, light temperature selection and controls for optional extras |
| **Occupancy light** | |
| **Mobility kit** | Set of detachable casters for moving booths.<br>Can be used for all Chatbox models. |

# Options for surfaces

## Exterior colors collection

White | Black | Cotton | Opal | Marshmallow | Myosotis | Paprika | Azurite | Storm Gray | Frozen Blue | Whiteboard paint | Slatted wall

### Standard wall and ceiling

Dark gray

### Standard floor

Dark gray

### Standard profile

Black

silen CHATBOX

LIKO-S

# Chatbox Duo Plus

**More for up to four**

Not too big, not too small — just right.
From a solo superhero to the fantastic four.
Enjoy alone or with three more.



1-4 people

c UL us LISTED

CERTIFIED INDOOR AIR QUALITY

CE

### Essential quality
With a sole focus on essential features, you enjoy world-class quality without breaking the bank.

### Quiet
Best-in-class soundproofing. Blocks 34dB outside noise, 31dB inside speech. Office-tested, ISO-approved in the laboratory.

### Comfortable
Ergonomic, quiet, echo-free, and speech-optimized. Automated LEDs and ventilation. Over twice the standard airflow rate.

### Easy to relocate
Add-on mobility kit for in-office relocation. Easy reassembly for moving offices.

### Quick assembly
Thanks to its smart prefabricated design, it sets up in 90 minutes. Disassembly and reassembly are just as easy.

### Endless customization
Swap side skins and cover trims with a snap of a magnet. Choose from a variety of colors, fabrics, and furnishing options.

### Sustainable
Fully renewable with a 20+ year lifespan. Designed sustainably across materials, production, and impact on surrounding environments.

### Standard exterior colors


- Black
- White

### Standard interior color


- Dark gray

### Colour collection for additional price


- Cotton
- Opal
- Marshmallow
- Myosotis
- Paprika
- Azurite
- Storm Gray
- Frozen Blue

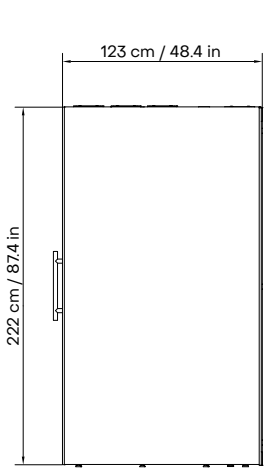



RIGHT VIEW

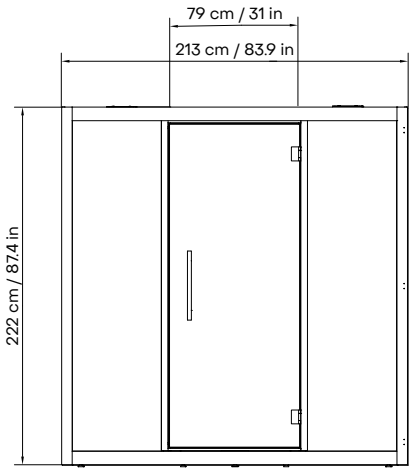



FRONT VIEW

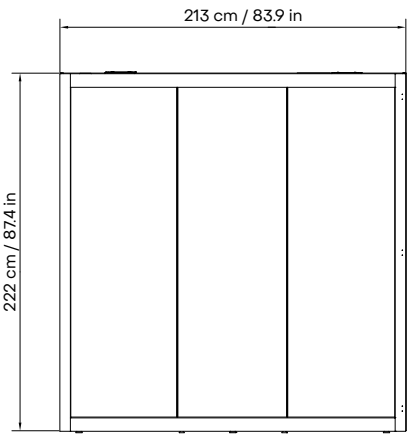



REAR VIEW

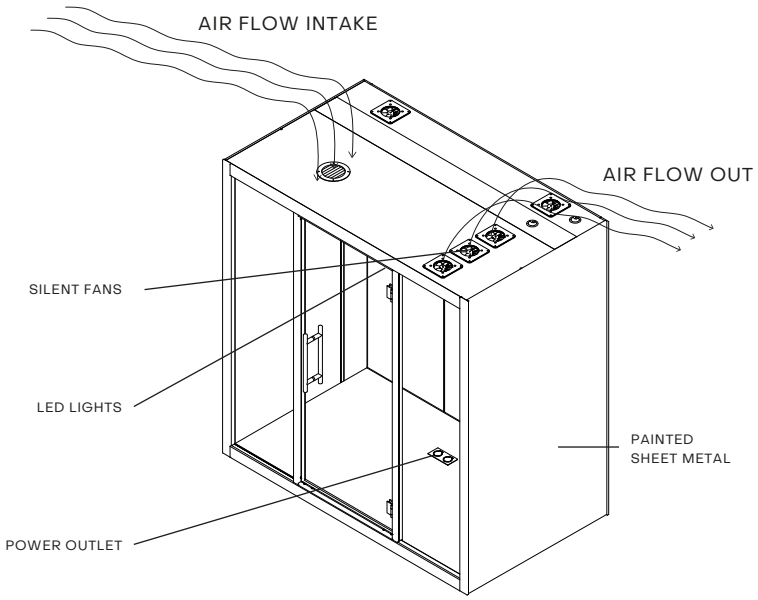


TOP VIEW

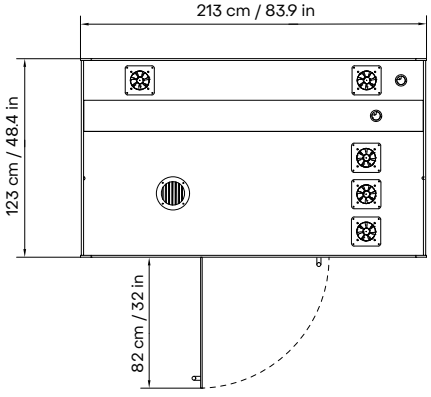


MINIMAL SPACE BETWEEN POD AND CEILING

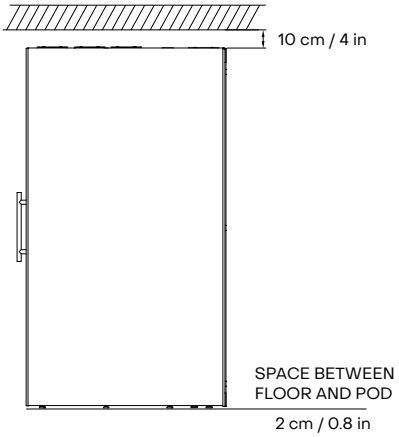

# Chatbox Duo Plus technical specification

| GENERAL PRODUCT INFO | |
|---|---|
| **Exterior size (W×D×H)** | 213 × 123 × 222 cm<br>83.9 × 48.4 × 87.4 in |
| **Interior size (W×D×H)** | 200 × 116 × 204 cm<br>78.7 × 35.8 × 80.3 in |
| **Weight (net)** | 580 kg / 1280 lb |
| **Door handedness** | left- and right-handed door in one |
| **Air ventilation** | low consumption air circulation system (max 5.1 W) |
| **Air flow** | air circulation speed is more than 70 l/s (198 $m^3$/h) (252 $ft^3$/min) |
| **Lighting** | energy-efficient LED light (28 W, 4000 K, 2240 lm) |
| **Power outlets** | Option one: 2 x 110-240 V (10 A)<br>Option two: 110-240 V (10 A) + USB-A+C |
| **Power cord** | 3 m / 9 ft 10 in |
| **Exterior material** | painted sheet metal |
| **Glass** | sound control laminated safety glass |
| **Floor** | antistatic and stain resistant low loop pile carpet for public spaces, EN 1307 |
| **Acoustic surfaces** | acoustic EchoFree panel |
| **Adjustable glides** | for easy leveling from inside the booth |

| CERTIFICATION | |
|---|---|
| **Electrical safety** | CE-mark |
| **Fire safety** | Class A according to UL 723, ASTM E84, ASTM E162 (walls and ceiling) |
| **Emissions** | Indoor Advantage™ Gold certified by SCS Global Services |
| **Sound reduction** | 29,4 db (class B according to ISO 23351-1) |
| **Airborne sound insulation R'w** | 34 dB according to ISO 16283-1 and ISO 717-1, measured on site by an accredited specialist |
| **Sound transmission class STC** | 34 dB according to ASTM E90, measured on site by an accredited specialist |


# Chatbox Duo Plus features



*Retractable coat/bag hook*



*Control panel*



*Occupancy light*




*Mobility kit*

| EXTRA FEATURE | |
|---|---|
| **Retractable coat/bag hook** | A practical and nice-looking foldable hook for coat or bag |
| **Control panel** | Airflow dimmer, light brightness dimmer, light temperature selection and controls for optional extras |
| **Occupancy light** | |
| **Mobility kit** | Set of detachable casters for moving booths.<br>Can be used for all Chatbox models. |

# Options for surfaces

## Exterior colors collection



White | Black | Cotton | Opal | Marshmallow | Myosotis | Paprika | Azurite | Storm Gray | Frozen Blue | Whiteboard paint | Slatted wall

## Standard wall and ceiling



Dark gray

## Standard floor



Dark gray

## Standard profile



Black

silen CHATBOX

LIKO-S

# Chatbox Quattro

**Camping makes perfect**

An hour shared by four people is a luxury.
Make it count, free of outside distractions –
and without disturbing what's outside.
Meet, focus, and create in peace and privacy.

**1-6 people**



### Essential quality
With a sole focus on essential features, you enjoy world-class quality without breaking the bank.

### Quiet
Best-in-class soundproofing. Blocks 34dB outside noise, 31dB inside speech. Office-tested, ISO-approved in the laboratory.

### Comfortable
Ergonomic, quiet, echo-free, and speech-optimized. Automated LEDs and ventilation. Over twice the standard airflow rate.

### Easy to relocate
Add-on mobility kit for in-office relocation. Easy reassembly for moving offices.

### Quick assembly
Thanks to its smart prefabricated design, it sets up in 2.5 hours. Disassembly and reassembly are just as easy.


### Endless customization
Thanks to its smart prefabricated design, it sets up in 2.5 hours. Disassembly and reassembly are just as easy.

### Sustainable
Swap side skins and cover trims with a snap of a magnet. Choose from a variety of colors, fabrics, and furnishing options.


### Standard exterior colors
- Black
- White

### Standard interior color
- Dark gray


### Colour collection for additional price
- Cotton
- Opal
- Marshmallow
- Myosotis
- Paprika
- Azurite
- Storm Gray
- Frozen Blue

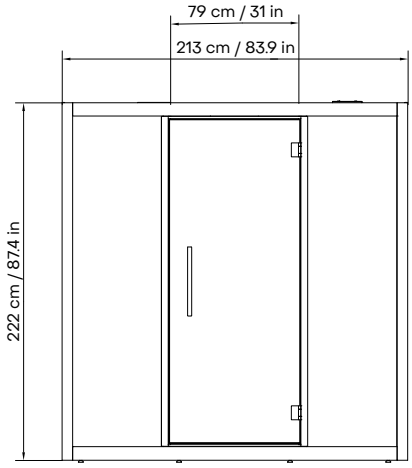



FRONT VIEW

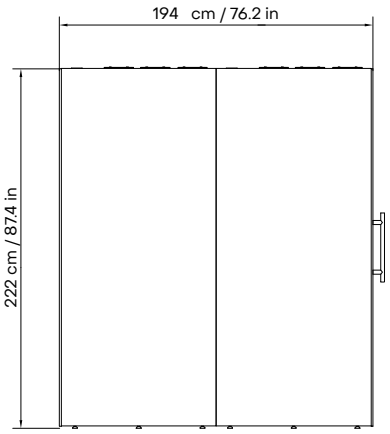



LEFT VIEW

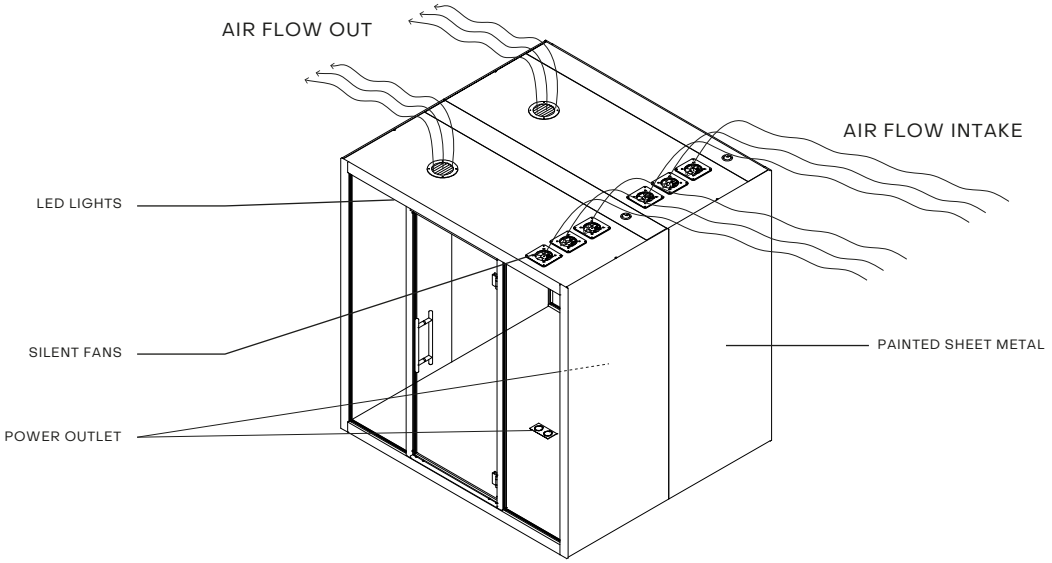


TOP VIEW

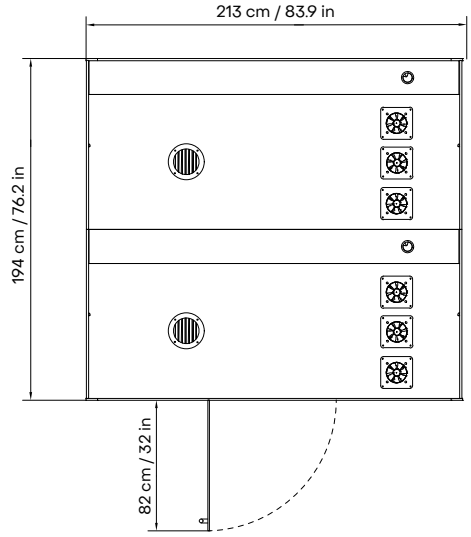


MINIMAL SPACE BETWEEN POD AND CEILING

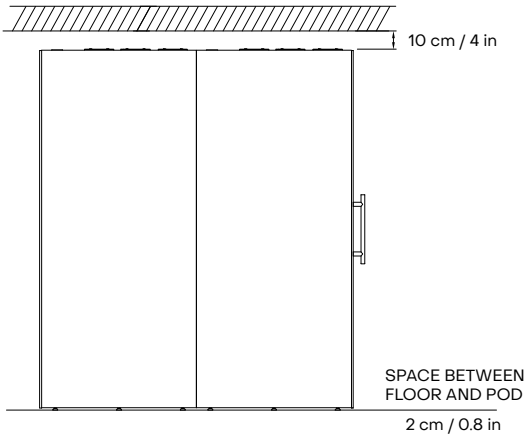

# Chatbox Quattro technical specification

| GENERAL PRODUCT INFO | |
|---|---|
| **Exterior size (W×D×H)** | 213 × 194 × 222 cm<br>83.9 × 76.2 × 87.4 in |
| **Interior size (W×D×H)** | 200 × 186 × 204 cm<br>78.7 × 73.3 × 80.3 in |
| **Weight (net)** | 980 kg / 2160 lb |
| **Door handedness** | left- and right-handed door in one |
| **Air ventilation** | low consumption air circulation system (max 10,2 W) |
| **Air flow** | air circulation speed is more than 85 l/s (306 $m^3$/h) (180 $ft^3$/min) |
| **Lighting** | energy-efficient LED light (56 W, 4000 K, 4480 lm) |
| **Power outlets** | Option one: 4 x 110-240 V (10 A)<br>Option two: 2 x 110-240 V (10 A) + 2 x USB-A+C |
| **Power cord** | 3 m / 9 ft 10 in |
| **Exterior material** | painted sheet metal |
| **Glass** | sound control laminated safety glass |
| **Floor** | antistatic and stain resistant low loop pile carpet for public spaces, EN 1307 |
| **Acoustic surfaces** | acoustic EchoFree panel |
| **Adjustable glides** | for easy leveling from inside the booth |

| CERTIFICATION | |
|---|---|
| **Electrical safety** | CE-mark |
| **Fire safety** | Class A according to UL 723, ASTM E84, ASTM E162 (walls and ceiling) |
| **Emissions** | Indoor Advantage™ Gold certified by SCS Global Services |
| **Sound reduction** | 30,2 db (class A according to ISO 23351-1) |
| **Airborne sound insulation R'w** | 34 dB according to ISO 16283-1 and ISO 717-1, measured on site by an accredited specialist |
| **Sound transmission class STC** | 34 dB according to ASTM E90, measured on site by an accredited specialist |


# Chatbox Quattro features



*Retractable coat/bag hook*



*Control panel*



*Occupancy light*




*Mobility kit*

| EXTRA FEATURE | |
|---|---|
| **Retractable coat/bag hook** | A practical and nice-looking foldable hook for coat or bag |
| **Control panel** | Airflow dimmer, light brightness dimmer, light temperature selection and controls for optional extras |
| **Occupancy light** | |
| **Whiteboard** | Magnetic laminate surface |
| **Screen bracket** | Universal bracket in accordance with VESA standard, for up to 32” screen (screen not included) |
| **Booking bracket** | Bracket for a tablet (tablet and booking system not included) |
| **VC ready** | Readiness for video conferencing system (includes only necessary ports and brackets) |
| **VC system** | Video conferencing system with screen bracket (excl. screen) |
| **Mobility kit** | Set of detachable casters for moving booths. Can be used for all Chatbox models. |

# Options for surfaces

## Exterior colors collection



White | Black | Cotton | Opal | Marshmallow | Myosotis | Paprika | Azurite | Storm Gray | Frozen Blue | Whiteboard paint | Slatted wall

### Standard wall and ceiling




Dark gray

### Standard floor



Dark gray

### Standard profile



Black

silen CHATBOX

# Chatbox furniture sets

**Silen Chatbox Single**

## Phone booth

- Antibacterial tabletop
- Fully integrated and adjustable stool



## Video call booth

- Screen bracket with V/C readiness
- Antibacterial tabletop
- HAY Revolver or integrated stool



**Silen Chatbox Solo**

## Sit-down set

- Fixed height table
- Antibacterial white tabletop
- Ergonomic sofa



## Sit-stand table

- Electrically adjustable table
- Antibacterial white tabletop
- Your own favorite chair



silen CHATBOX

# Chatbox furniture sets

**Silen Chatbox Duo**

## Sofas and integrated table

- Comfort-focused low-back sofas
- Integrated table with antibacterial tabletop



## Sofas and laptop tables

- Comfort-focused low-back sofas
- Movable laptop tables (2 pcs)



**Silen Chatbox Duo Plus**

## Sofas and integrated table

- Comfort-focused low-back sofas
- Integrated table with antibacterial tabletop



## Sofas and laptop tables

- Comfort-focused low-back sofas
- Movable laptop tables (2 pcs)



silen CHATBOX

# Chatbox furniture sets

**Silen Chatbox Quattro**

## Sofas and integrated table

- Comfort-focused low-back sofas
- Integrated table with antibacterial tabletop



## Sofas and laptop tables

- Comfort-focused low-back sofas
- Movable laptop tables (4 pcs)



silen | LIKO-S

LIKO-S.COM

silen
Authorized dealer